



ISO 9001/AS9100 Certified

# GT320

HIGH PRESSURE, FATIGUE RATED PRESSURE TRANSDUCERS

YOUR ENGINEERED SOLUTION SOURCE <sup>SM</sup>



## DESCRIPTION

The Series GT320 pressure transducers are mV/V output units designed to address extremely high pressure applications to 100,000 psi.

In addition, the special sensor design of the GT320 pressure transducer makes it ideal for fatigue rated applications for pressures ranging from 20,000 psi to 50,000 psi. These 0.25% accuracy pressure transducers provide excellent pressure sensor solutions for applications such as homogenizing, fuel injection testing, water jet cutting, and high pressure metal forming.

All GT320 products are constructed of all-welded stainless steel and are manufactured to be shock and vibration resistant. A comprehensive selection of pressure ports and electrical terminations is available. Each unit is shipped with a 15 point calibration record traceable to NIST as standard.

## STANDARD FEATURES

- Pressure Ranges To 100,000 psi
- Fatigue Rated
- mV/V Output
- $\pm 0.25\%$  FSO Accuracy
- Stainless Steel Construction
- Shock and Vibration Resistant
- 15 Point Calibration Record Traceable to NIST

## OPTIONAL FEATURES

- Customer Specified Electrical Connections
- Extended Temperature Compensation Ranges
- Special Calibrations



A US Manufacturer of: Pressure, Temperature, Load/  
Force/Torque, and Displacement Sensors.

## PERFORMANCE

### STATIC ACCURACY

± 0.25% nominal FSO by BFSL  
(Ranges 20000 psi to 75000 psi)  
± 0.35% FSO by BFSL  
(Ranges >75000 psi to 100,000 psi)

### FULL SCALE OUTPUT

2.0 ± 0.02 mV/V @ 70°F.  
(Ranges 20000 psi to 75000 psi)  
1.0 ± 0.01 mV/V @ 70°F.  
(Ranges >75000 psi to 100,000 psi)

### RESOLUTION

Analog: Infinite.

### THERMAL ERROR

< ± 0.020% FSO/°F (typical).

### SPAN

± 1% FSO at 70°F.

### ZERO BALANCE

±1% FSO at 70°F.

## MECHANICAL CHARACTERISTICS

### STANDARD RANGES

20000, 30000, 40000, 50000, 60000, 75000,  
100000 PSIA / PSIG.

### PROOF PRESSURE

1.5x range or 120,000 PSIG, whichever is less

### BURST PRESSURE

2.0x Range or 150,000 PSIG, whichever is less

### OPERATING MEDIA

Fluids and gases compatible stainless steel.

### ENCLOSURE

Body of stainless steel.

### PRESSURE FITTING

(For ranges 20,000 psi thru 60,000 psi).

AE F250-C, 9/16"-18 UNF, or equivalent  
Female (Standard).

(For ranges 75,000 psi thru 100,000 psi)

AE F312-C150, 5/8"-18 UNF, or equivalent  
Female (Standard)

For additional pressure fittings please  
consult factory.

### WEIGHT

Approximately 10 oz.

## ELECTRICAL CHARACTERISTICS

### EXCITATION

10 Vdc recommended, 15 Vdc max.

### INPUT / OUTPUT RESISTANCE

350 ± 3.5 ohms at 70°F.

### INSULATION RESISTANCE

> 10K megohms at 50 Vdc at 70°F.

### ELECTRICAL TERMINATION

PTIH-10-6P stainless steel connector or  
equivalent.

Optional electrical terminations available.


## ENVIRONMENTAL CHARACTERISTICS

### COMPENSATED TEMPERATURE RANGE

-30°F to +170°F. Options available.

### OPERATING TEMPERATURE RANGE

-65°F to +250°F.

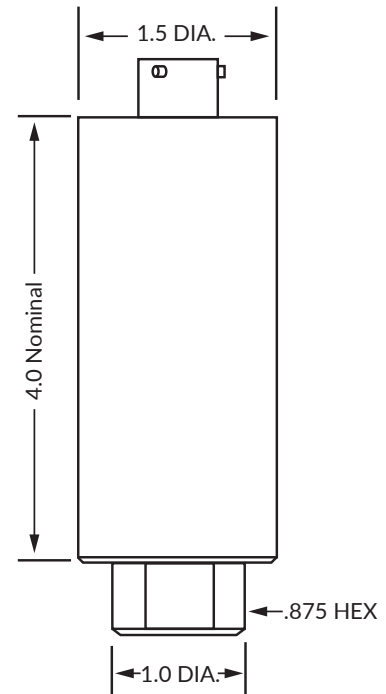

### MODIFICATIONS AND WARRANTY

MODIFICATIONS: We realize transducer applications vary greatly and as such our designs are flexible. Choice of pressure port, electrical termination, material compatibility and performance characteristics are a few of the many options available. Specifications on this datasheet represent the standard configuration only. Product and company names listed are trademarks of their respective companies. Specifications subject to change without notice.  
WARRANTY: Stellar Technology warrants that its product shall be free from defective workmanship and/or material for a twelve month period from the date of shipment, provided that Stellar Technology's obligation hereunder shall be limited to correcting any defective material FOB our factory. No allowance will be made for any expenses incurred for correcting any defective workmanship and/or material without written consent by Stellar Technology. This warranty is in lieu of all other warranties expressed or implied.



ISO 9001/AS9100  
237 Commerce Drive • Amherst, NY 14228 • USA  
Tel: 716.250.1900 • Fax: 716.250.1909  
Web: stellartech.com • Email: info@stellartech.com

Due to the nature of technology, changes are inevitable. For latest technical specifications, see our website.

