

Series LLS62X

Long Stroke LVDT Displacement Transducer,
DC/DC with Isolated Output, Spring Armature



Description

The Series LLS62X is a high performance long stroke DC powered LVDT displacement transducer with a spring return armature. It is identical to the LLS61X but operates from either +5 Vdc regulated or +6 to 18 Vdc unregulated supply and generates an output signal of ± 2 Vdc that is isolated from the input voltage. The armature is restrained and guided by a very low friction bearing assembly. An internal spring automatically positions the armature to its full extension. This unique design is used for applications where it is not possible to connect the transducer armature to the moving part being measured. These displacement transducers are ruggedly constructed of all stainless steel. All Series LLS62X displacement transducers are shipped with traceable calibration certificates.

Standard Features

- Stroke ranges from ± 0.5 inches to ± 3.0 inches
- Spring Return Armature
- Low Friction Bearing Assembly
- DC/DC with Isolated Voltage Output 2.2Vdc
- $\pm 0.5\%$ Linearity
- Encapsulated Integral Electronics
- All Stainless Steel Construction
- Traceable Calibration Certificate

Optional Features

- Improved Linearity (for some ranges)
- Sealing Against Moisture Ingress
- Probe Ends
- Mounting Blocks

Performance

Stroke Ranges

± 0.1 inches to ± 3.0 inches

Linearity

$\pm 0.5\%$ of full stroke max
 $\pm 0.25\%$ or ± 0.1 options on some ranges

Output


± 2.2 Vdc Nominal
(Isolated from Input Voltage)

LLS62X

Series LLS62X Specifications

Baseline Configuration Specs Represented.
Modifications Encouraged - See Below
Custom Designs Available

Dimensions (inches)

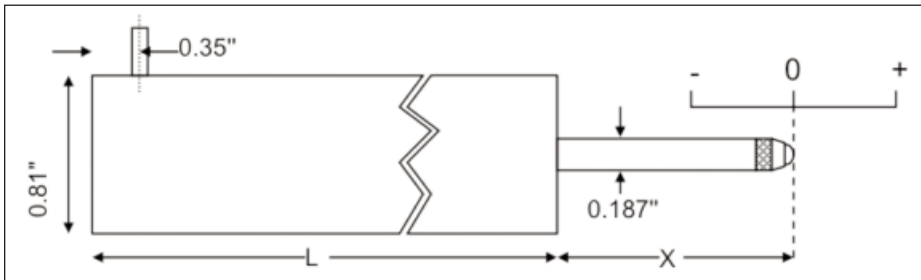

Range	Linearity error (% F.S.)	L	X	Total Weight	Spring Force at X	Spring Rate	Inward over-travel	Outward over-travel
±0.5"	<± 0.5	7.2"	1.5"	8oz	4.6oz	2.0oz/inch	0.04"	0.51"
±1"	<± 0.5	8.3"	2.5"	10oz	7.2oz	3.0oz/inch	0.12"	0.39"
±2"	<± 0.5	12.8"	3.0"	14oz	6oz	1.8oz/inch	0.31"	0.55"
±3"	<± 0.5	17.2"	4.5"	1.1lb	1lb	3.2oz/inch	0.59"	0.59"

Mechanical Characteristics

Case Material

Stainless steel.

Armature Type

Spring Return.

Probe

Ball end (standard).

Optional probes available.

Electrical Characteristics

Excitation / Supply

5 Vdc ±10% regulated.

6 to 18Vdc unregulated, 100 mA (typical).

Output Load (Minimum)

2K Ohms.

Output Ripple

30mV peak to peak.

Output Bandwidth

200 Hz (flat).

Output Impedance

2 Ohms.

Electrical Termination

Polyurethane Shield Cable (6 ft.).

Longer cable lengths (available option).

Radial Exit.

Environmental Characteristics

Operating Temperature Range

-60°F to +160°F

Temperature Effect on Zero

±0.006% F.S./°F (typical).

Temperature Effect on Span

±0.017% F.S./°F (typical).

MODEL IDENTIFICATION

L L S 6 2 X


SERIES

ELECTRICAL TERMINATIONS

Please specify termination required:

- X = 1 Axial Cable Exit (Optional)
- 2 Radial Cable Exit (Standard)
- 3 Axial Connector (Optional)
- 4 Radial Connector (Optional)

Connection Details

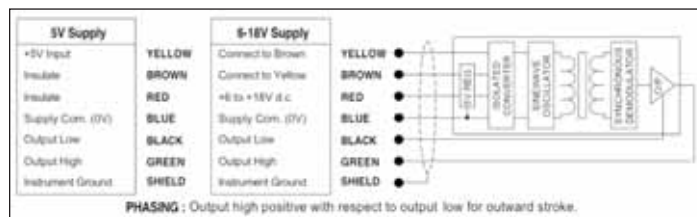

Modifications and Warranty

MODIFICATIONS: We realize transducer applications vary greatly and as such our designs are flexible. Choice of pressure port, electrical termination, material compatibility and performance characteristics are a few of the many options available. Specifications on this datasheet represent the standard configuration only. Product and company names listed are trademarks of their respective companies. Specifications subject to change without notice.

WARRANTY: Stellar Technology warrants that its product shall be free from defective workmanship and/or material for a twelve month period from the date of shipment, provided that Stellar Technology's obligation hereunder shall be limited to correcting any defective material FOB our factory. No allowance will be made for any expenses incurred for correcting any defective workmanship and/or material without written consent by Stellar Technology. This warranty is in lieu of all other warranties expressed or implied.

LORD SENSING
Stellar Technology

ISO 9001/AS9100

Due to the nature of technology, changes are inevitable. For latest technical specifications, see our website.

Copyright © 2015 LORD Corporation • All Rights Reserved
Datasheet P/N: 233636B DCN 9338

237 Commerce Drive • Amherst, NY 14228 • USA
Tel: 716.250.1900 • Fax: 716.250.1909
Web: stellartech.com • Email: info@stellartech.com